



Compendium of DMS Series

Three types of sensors

General type(DMS)	Waterproof type(Yellow)
General type(Aqua Blue)	Waterproof type(Yellow)

Manipulator industry(A05-DMS)	Oil resistance and deflection resistance (A06-DMS)
<p>Product characteristics:</p> <ol style="list-style-type: none"> Flexure resistant curve material can be used in manipulator industry, such as multi joint manipulator and tank chain. In case of high temperature, much dust, or water droplets and oil dust, the sensor shall take corresponding dust-proof measures. 	<p>Product characteristics:</p> <ol style="list-style-type: none"> Flexure resistant curve material can be used in manipulator industry, such as multi joint manipulator and tank chain. In case of welding slag, corresponding protective measures shall be taken for the sensor.
<p>High deflection wire</p> <p>The deflection is increased by about 20% compared with the general type</p>	<p>Oil resistant and flexural curve material</p> <p>The deflection is increased by about 20% compared with the general type. It can be used in oil dust environment.</p>

Bending resistance

SR: bending resistance

Impact resistant materials


Two kinds of accessories

DMSG can be mounted with 2 accessories, applicable to multi-cylinders.

DMSG	F-MQ□
	F-SC□SH

Note: The recommended minimum bending radius of A05-DMS, A06-DMS cables is 19mm.

Four types of cross section

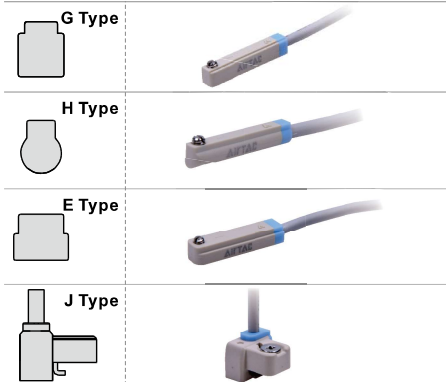

DMS Specifications

Item	DMS		
	2-wire	NPN	PNP
Model			
Power supply voltage	10V ~ 28V DC	5V ~ 30V DC	
Switching current	2.5mA ~ 100mA	30V/200mA Max.	
Contact capacity	2.8W Max.	6.0W Max.	
Current consumption	3mA Max.	5mA Max.	
Internal voltage drop	3.5V Max.	0.7V Max.	
Leakage current	0.05mA Max.	0.01mA Max.	
Switching frequency	1000Hz		
Impact resistance	50G		
Circuit protection	Reverse polarity protection Surge protection		
Operating Temp.	-10°C ~ 70°C		
Enclosure	DMS, A05-DMS: IP64 / A06-DMS: IP68		
Standard	CE marking, RoHS		

[Note] A05 \ A06 type has only two-wire type.

Ordering code for DMS

DMS G - □ 020 - □						
A05-DMS G - □ 020						
A06-DMS G - □ 020						

① Industry code	Blank: General type A05: Manipulator industry A06: Oil resistance and deflection resistance
② Model	DMS : Solid State Sensor
③ Specifications	G H E J [Noet1]
④ Output type	Blank: 2 wire N : NPN [Noet2] P : PNP
⑤ Lead wire	Direct lead wire 020: 2m 030: 3m 050: 5m 100: 10m
	Plug connector [Noet3] M08: 0.5m with M8 plug connector M08010: 1m with M8 plug connector M08020: 2m with M8 plug connector M08030: 3m with M8 plug connector M12: 0.5m with M12 plug connector M12010: 1m with M12 plug connector M12020: 2m with M12 plug connector M12030: 3m with M12 plug connector
⑥ Additional specification	Blank: General type W: Waterproof type IP68 [note4]

[Note1] Type J is not available for A06. [Note2] A05 and A06 have no NPN and PNP option. [Note3] A05 and A06 have no plug connector option. [Note4] A05, J type and M08, M12 don't have a-w Waterproof option. Standard A06 model already has a waterproof function. Add: The sockets of M08 and M12 need additional order. Please check on page 371.





Compendium of EMS Series

General type(EMS)

General type(Aqua Blue) Waterproof type(Yellow)

Manipulator industry(A05-EMS)

Product characteristics:
1. Flexure resistant curve material can be used in manipulator industry, such as multi joint manipulator and tank chain.
2. In case of high temperature, much dust, or water droplets and oil dust, the sensor shall take corresponding dust-proof measures.

High deflection wire

The deflection is increased by about 20% compared with the general type

Oil resistance and deflection resistance (A06-EMS)

Product characteristics:
1. Flexure resistant curve material can be used in manipulator industry, such as multi joint manipulator and tank chain.
2. In case of welding slag, corresponding protective measures shall be taken for the sensor.

Oil resistant and flexural curve material

The deflection is increased by about 20% compared with the general type. It can be used in oil dust environment.

Waterproof design(IP68)

Three types of sensors

Bending resistance

SR: bending resistance

Impact resistant materials

High cylinder installation flexibility

EMSG is the mini type corresponding to DMSG, which can be used for long and short strokes.
EMSH is the mini type corresponding to DMSH, which can be used for long and short strokes.

Note: The recommended minimum bending radius of A05-EMS, A06-EMS cables is 19mm.

Two types of cross section

G Type	General type(Aqua Blue)	Waterproof type(Yellow)
H Type	General type(Aqua Blue)	Waterproof type(Yellow)

EMS Specifications

Item	EMS
Model	2-wire
Power supply voltage	10V ~ 28V DC
Switching current	2.5mA ~ 100mA
Contact capacity	2.8W Max.
Current consumption	3mA Max.
Internal voltage drop	3.5V Max.
Leakage current	0.06mA Max.
Switching frequency	1000Hz
Impact resistance	50G
Circuit protection	Reverse polarity protection Surge protection
Operating Temp.	-10°C ~ 70°C
Enclosure	EMS, A05-EMS: IP64 / A06-EMS: IP68
Standard	CE marking, RoHS
Note	Temperature overheat protection

Ordering code for EMS

EMS G - □ 020 - □	G H		M08	M12
A05-EMS G - □ 020				
A06-EMS G - □ 020				
① Industry code	Blank: General type A05: Manipulator industry A06: Oil resistance and deflection resistance			
② Model	EMS : Solid State Sensor			
③ Specifications	G H			
④ Output type	Blank: 2 wire			
⑤ Lead wire	Direct lead wire	020: 2m 030: 3m 050: 5m 100: 10m		
	Plug connector [Noet1]	M08:0.5m with M8 plug connector M08010:1m with M8 plug connector M08020:2m with M8 plug connector M08030:3m with M8 plug connector	M12:0.5m with M12 plug connector M12010:1m with M12 plug connector M12020:2m with M12 plug connector M12030:3m with M12 plug connector	
⑥ Additional specification	Blank: General type W: Waterproof type IP68 [note2]			

[Note1] A05 and A06 have no plug connector option. [Note2] A05 and A06 don't have a-w Waterproof option. Standard A06 model has a waterproof function. Add: The sockets of M08 and M12 need additional order. Please check on page 371.





Compendium of CMS Series

General type(CMS)

General type(blue) High temperature type (red)

Manipulator industry(A05-CMS)

High deflection wire

The deflection is increased by about 20% compared with the general type

Product characteristics:

1. Flexure resistant curve material can be used in manipulator industry, such as multi joint manipulator and tank chain.
2. In case of high temperature, much dust, or water droplets and oil dust, the sensor shall take corresponding dust-proof measures.

Note: The recommended minimum bending radius of A05-CMS cables is 19mm.

Two types of sensors

Bending resistance

SR: bending resistance

Impact resistant materials

Two kinds of accessories

CMSG can be mounted with 2 accessories, applicable to multi-cylinders.

Four types of cross section

G Type		
H Type		
E Type		
J Type		

CMSG		F-MQ□	
		F-SC□SH	

CMS Specifications

Item	CMS	
	General	Heat resistant
Model	General	Heat resistant
Power supply voltage	5V ~ 240V AC/DC	
Switching current	100mA	
Contact capacity	10W Max.	
Current consumption	N/A	
Internal voltage drop	2.5V Max. @100mA DC	N/A
Leakage current	N/A	
Switching frequency	200Hz	
Impact resistance	50G	
Circuit protection	N/A	
Operating Temp.	-10°C ~ 70°C	-10°C ~ 125°C
Enclosure	IP64	
Standard	CE marking, RoHS	

Ordering code for CMS

CMS G - 020 - □

A05-CMS G - 020

① ② ③ ④ ⑤

① Industry code	Blank: General type A05: Manipulator industry
② Model	CMS : Reed Sensor
③ Specifications	G H E J
④ Lead wire	020: 2m 030: 3m 050: 5m 100: 10m
⑤ Additional specification	Blank: General type H: Heat resistant [note2]

Plug connector [Noet1]

M08: 0.5m with M8 plug connector	M12: 0.5m with M12 plug connector
M08010: 1m with M8 plug connector	M12010: 1m with M12 plug connector
M08020: 2m with M8 plug connector	M12020: 2m with M12 plug connector
M08030: 3m with M8 plug connector	M12030: 3m with M12 plug connector

[Note1]A05 has no plug connector option. [Note2]A05 has no heat resistant option.
Add: The sockets of M08 and M12 need additional order. Please check on page371.



Ordering code for accessories

F - MQ □ Cylinder Accessory

① ② ③



① Category	F : Accessory								
② Model	MQ : Cylinder Accessory								
③ Cylinder	Aluminum alloy			Aluminum alloy (Thick type)			Stainless steel		
	Code	For series	For bore size	Code	For series	For bore size	Code	For series	For bore size
	A20: Φ20mm		Φ20	A32T: Φ32mm		Φ32	S06: Φ6mm		Φ6
A25: Φ25mm		Φ25	A40T: Φ40mm	TWG	Φ40	S08: Φ8mm		Φ8	
A32: Φ32mm	MCK	Φ32	A50T: Φ50mm		Φ50	S10: Φ10mm		Φ10	
A40: Φ40mm	MBL	Φ40				S12: Φ12mm		Φ12	
A50: Φ50mm		Φ50				S16: Φ16mm	PB/PBR	Φ16	
A63: Φ63mm		Φ63				S20: Φ20mm	MI	Φ20	
A80: Φ80mm		Φ80				S25: Φ25mm	MG	Φ25	
						S32: Φ32mm	MA/MAC	Φ32	
						S40: Φ40mm		Φ40	
						S50: Φ50mm		Φ50	
						S63: Φ63mm		Φ63	

F - SC □ SH Tie Rod Cylinder Accessory


① ② ③ ④



① Category	F : Accessory		
② Model	SC : Tie Rod Cylinder Accessory		
③ Cylinder	Code	For series	For bore size
		32	
	50		Φ50
	63		Φ63
	80	SC	Φ80, Φ100
	125	SGC	Φ125
	160		Φ160, Φ200
	250		Φ250
④ Attached			


Dimensions

DMSG/CMSG Type

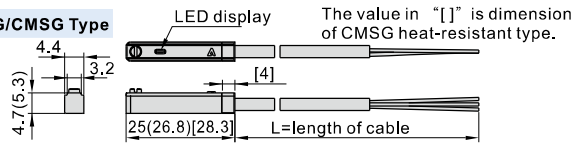


Note: The value in "()" is dimension of CMSG type.

DMSE/CMSE Type

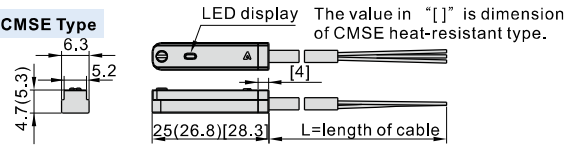


Note: The value in "()" is dimension of CMSE type.

DMSH/CMSH Type


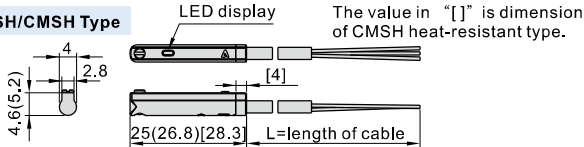


Note: The value in "()" is dimension of CMSH type.

CMSJ Type




DMSJ Type

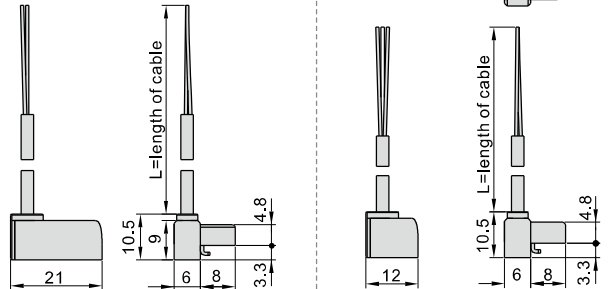


length of cable specification	length of cable(L)
020 Type	2000mm
030 Type	3000mm
050 Type	5000mm

EMSG Type

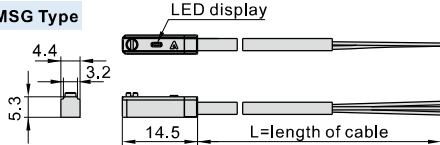

Note: a number in the bracket is the dimension of CMSGH.


EMSH Type

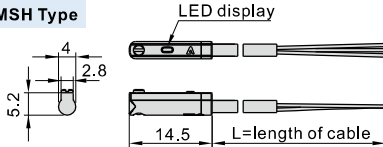


Connection method

2 wire, reed sensor connection


1.General connection



2.Series connection(And)

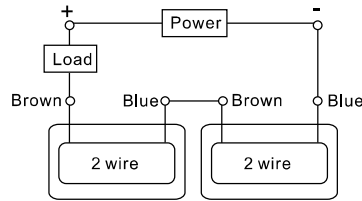


3.Parallel connection(OR)

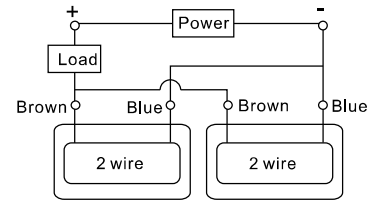


3 wire, solid state NPN connection

1.General connection




Note: The indicator lights will light up when both auto switches are turned NO.

2.Series connection(And)

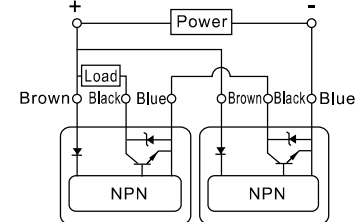


3.Parallel connection(OR)

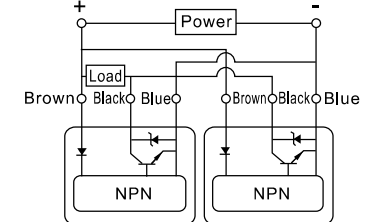


3 wire, solid state PNP connection

1.General connection




Note: The indicator lights will light up when both auto switches are turned NO.

2.Series connection(And)

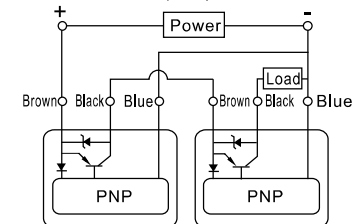













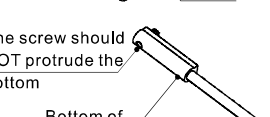
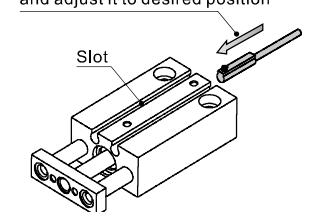
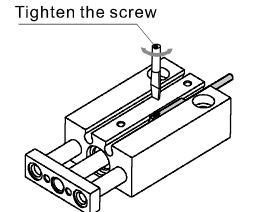


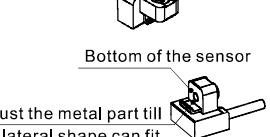
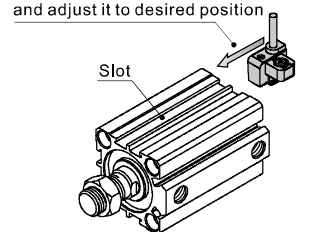
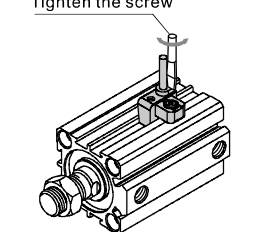
3.Parallel connection(OR)



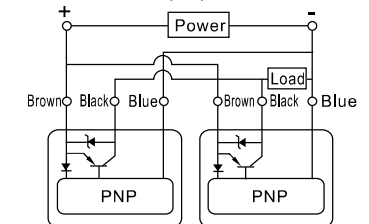

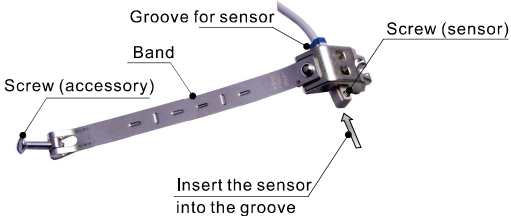
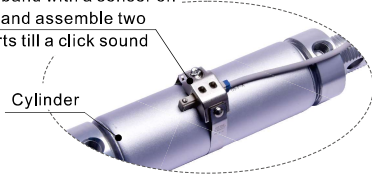
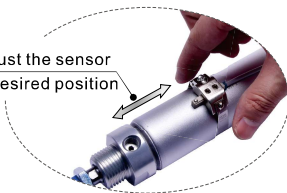



The selection of sensor

DMSG	CMSG	EMSG	HFKL		MCK				ACQ/TACQ								ACQ			RMTL	RMT	RMTL	SDA/RMT/RMTL				SDA						
	10	16	20	25	25	32	40	50	63	80	12	16	20	25	32	40	50	63	80	100	125	140	160	10	16	20	25	32	40	50	63	80	100
	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	HFK	HFK/HFKP	HFK	TCL/TCM								QCK				TR																	
	10	16	20	25	32	40	6	10	12	16	20	25	32	40	50	63	80	100	12	16	20	25	32	40	50	63	6	10	16	20	25	32	
	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
SAU				HFZ				HFY				HFP				MD/MK				AQK/BAQK													
32	40	50	63	80	100	6	10	16	20	25	32	40	6	10	16	20	25	32	10	16	20	25	32	6	10	16	20	25	32	50			
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
Stainless steel																																	
PB/PBR				MI				MI/TMI				MI				MF				MG				MA/MAC									
6	8	10	12	16	8	10	12	16	20	25	32	40	20	25	32	40	20	25	32	40	50	63	16	20	25	32	40	50	63				
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
Aluminum alloy												It needs an accessory to mount a sensor on a cylinder																					
MBL				MCK																													
20	25	32	40	50	63	40	50	63	80																								
•	•	•	•	•	•	•	•	•	•																								
SC												SGC				It needs an accessory to mount a sensor on a cylinder																	
32	40	50	63	80	100	125	160	200	250	125	160	200	250																				
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•													•	•	•	•	•	•
DMSJ	CMSJ	ACQ/TACQ								SDA								QCK				QDK				TN							
	32	40	50	63	80	100	12	16	20	25	32	40	50	63	80	100	32	40	50	63	20	25	32	40	10	16	20	25	32				
	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			
DMSH	CMSH	EMSH	ACQ	TC	HFZ				HFY	HFP	HFR				HFC				HFT														
	125	140	160	6	10	6	10	16	20	25	32	40	6	32	10	16	20	25	32	16	20	25	32	40	50	63	10	16	20	25	32		
	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
	QDK	HLQ/HLQL				HLS/HLSL				MU				HLH				MPG															
	20	25	32	40	6	8	12	16	20	25	6	8	12	16	20	25	6	8	10	12	16	20	6	10	16	20	6	8	10	12	16		
	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
HRQ				HFK				HLF				HGS				RMH				HFD													
2	3	7	10	20	30	50	70	100	200	10	16	20	25	32	40	8	12	16	20	6	8	10	12	10	16	20	25	8	12	16	20	25	
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
HFKL				HFCQ				HRS				HFKP																					
10	16	20	25	16	20	25	32	40	50	63	10	15	20	30	40	16	20	25	32														
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•														
DMSE	CMSE	SAI/TSAI				SAI				ACE				ACE/JSI																			
	32	40	50	63	80	100	125	160	200	12	16	20	25	32	40	50	63	80	100	125													
	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•													





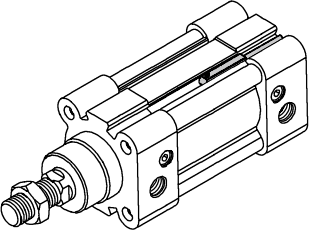
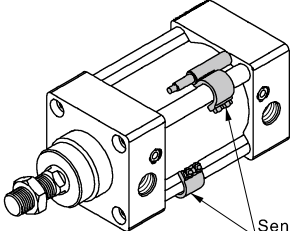
Installation

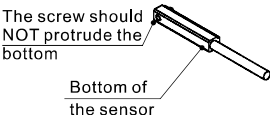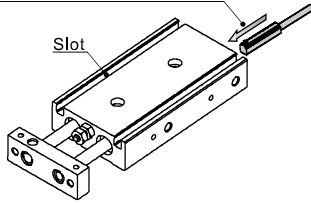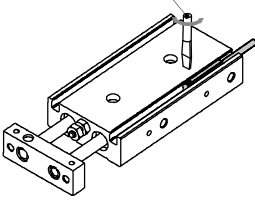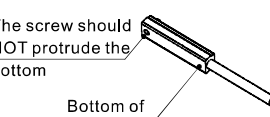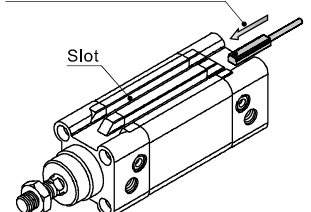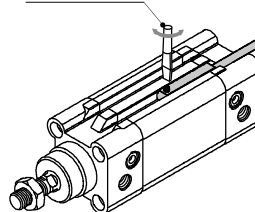



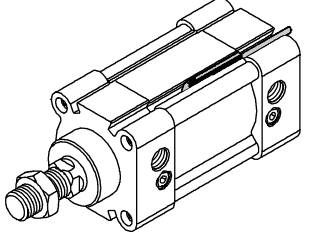
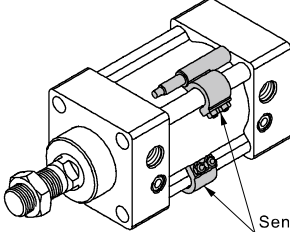
Sensor model	Procedure		
<p>DMSG/CMMSG/EMSG</p> 	<p>1</p> <p>loose the screw</p>  <p>Screw</p> <p>Sensor</p> <p>The screw should NOT protrude the bottom</p>  <p>Bottom of the sensor</p>	<p>2</p> <p>Insert the sensor into the slot and adjust it to desired position</p>  <p>Slot</p>	<p>3</p> <p>Tighten the screw</p> 
<p>DMSE/CMSE</p> 	<p>1</p> <p>loose the screw</p>  <p>Screw</p> <p>Sensor</p> <p>The screw should NOT protrude the bottom</p>  <p>Bottom of the sensor</p>	<p>2</p> <p>Insert the sensor into the slot and adjust it to desired position</p>  <p>Slot</p>	<p>3</p> <p>Tighten the screw</p> 
<p>DMSH/CMSH/EMSH</p> 	<p>1</p> <p>loose the screw</p>  <p>Screw</p> <p>Sensor</p> <p>The screw should NOT protrude the bottom</p>  <p>Bottom of the sensor</p>	<p>2</p> <p>Insert the sensor into the slot and adjust it to desired position</p>  <p>Slot</p>	<p>3</p> <p>Tighten the screw</p> 
<p>DMSJ/CM SJ</p> 	<p>1</p> <p>loose the screw</p>  <p>Sensor</p> <p>Screw</p> <p>Bottom of the sensor</p> <p>Adjust the metal part till the lateral shape can fit the slot of the cylinder</p> 	<p>2</p> <p>Insert the sensor into the slot and adjust it to desired position</p>  <p>Slot</p>	<p>3</p> <p>Tighten the screw</p> 

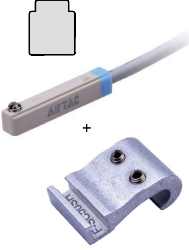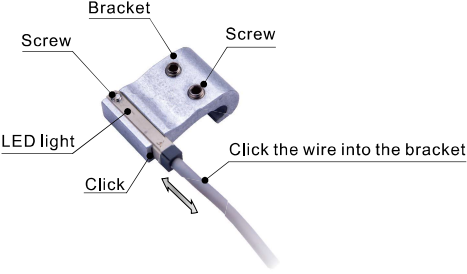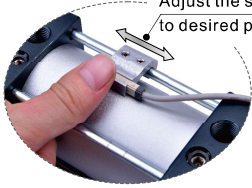Sensor model	Procedure	
<p data-bbox="95 224 249 272">DMSG+(F-SC□SH) CMSG+(F-SC□SH)</p> 	<p data-bbox="284 214 298 233">1</p>  <p data-bbox="323 258 785 533">Bracket Screw Screw LED light Click Click the wire into the bracket</p>	<p data-bbox="810 214 824 233">2</p>  <p data-bbox="939 301 1296 359">Tied rod Assemble the bracket and a rod</p> <p data-bbox="851 461 1019 504">The sensor will attach to the surface</p>
	<p data-bbox="284 569 298 589">3</p>  <p data-bbox="509 654 659 697">Adjust the sensor to desired position</p>	<p data-bbox="810 569 824 589">4</p>  <p data-bbox="873 654 1271 683">Pressing Keep pressing the bracket and tighten the screw</p>
<p data-bbox="103 935 239 983">DMSG+(F-MQ□) CMSG+(F-MQ□)</p> 	<p data-bbox="284 925 298 944">1</p>  <p data-bbox="285 993 789 1209">Groove for sensor Band Screw (accessory) Screw (sensor) Insert the sensor into the groove</p>	<p data-bbox="810 925 824 944">2</p>  <p data-bbox="831 993 1135 1064">Tie up the band with a sensor on a cylinder and assemble two plastic parts till a click sound</p> <p data-bbox="915 1099 995 1122">Cylinder</p>
	<p data-bbox="284 1280 298 1300">3</p>  <p data-bbox="379 1408 529 1450">Adjust the sensor to desired position</p>	<p data-bbox="810 1280 824 1300">4</p>  <p data-bbox="929 1379 1065 1402">Tighten the screw</p>

Sensor for "米" shape cylinder


SAI, SAU series will substitute for SI, SU series. And the corresponding sensors have some adjustments as the chart below.

New type(SAI)		Previous type(SI)	
Cylinder and accessory	<p>Cylinder</p>  <p>Sensor</p>  <p>CMSE \ DMSE</p>	Cylinder and accessory	<p>Cylinder</p>  <p>Sensor</p>  <p>CS1B1 / DS1B1 CS1B2 / DS1B2 CS1B3 / DS1B3 CS1B4 / DS1B4 CS1B5 / DS1B5 CS1B6 / DS1B6 CS1B7 / DS1B7</p> <p>CS1F/DS1F/CS1U/DS1U + F-SI32H/F-SI40H F-SI50H/F-SI63H F-SI80H/F-SI100H F-SI125H/F-SI160H F-SI200H</p>
Installation		Installation	 <p>Sensor (CS1F/DS1F/CS1U/DS1U) Mounting bracket (F-SI32H-F-SI200H) "米" shape cylinder (SI series)</p> <p>Sensor (CS1B1-B7/DS1B1-B7)</p>

New type(SAU)		Previous type(SU)	
Cylinder and accessory	<p>Cylinder</p>  <p>Sensor</p>  <p>DMSG \ CMSG \ EMSG</p>	Cylinder and accessory	<p>Cylinder</p>  <p>Sensor</p>  <p>CS1B1 / DS1B1 CS1B2 / DS1B2 CS1B3 / DS1B3 CS1B4 / DS1B4</p> <p>CS1F/DS1F/CS1U/DS1U + F-SU32H/F-SU40H F-SU50H/F-SU63H F-SU80H/F-SU100H</p>
Installation		Installation	 <p>Sensor (CS1F/DS1F/CS1U/DS1U) Mounting bracket (F-SU32H-F-SU100H) "米" shape cylinder (SU series)</p> <p>Sensor (CS1B1-B4/DS1B1-B4)</p>

Socket




Ordering code






① Category code	F : Accessory			
② Specification code	EC : Connecting Wire			
③ Socket type	M08:M8 socket	M12:M12 socket		
④ Wire type	B: 2-wire type		C:3-wire type	
⑤ Wire length	020: 2 meters	030:3meters	050:5meters	100:10meters
⑥ Additional specification	Blank: General type			

Appearance

M8 socket

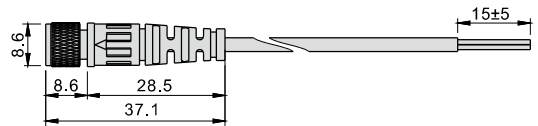

M12 socket

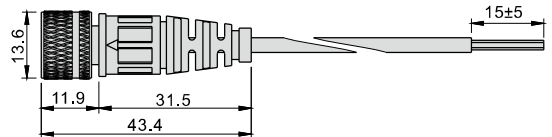

Instruction

- Sensor shall not fall down or bear great impact when it is installed.
- The wire of the Sensor shall not move with the action of cylinder.
- Clamping torque shall be within the allowable scope when the Sensor is installed(0.15~0.2Nm).
- Sensor shall be installed in the middle position of the action scope.
- Sensor wiring:
 - The wire is unable to bear repetitive torsion and tension. Please wire an external load before switch the power on.
 - No poor insulation in wire.
 - Do not wire with power line, high voltage line or use one wiring pipe.
 - Pleas wire the circuit correctly base on the circuit diagram.
- Execute scheduled maintenance by the following guidelines:
 - Make sure the sensor is firmly fixed.
 - Make sure the wire is intact.
 - Make sure that LED indicate the movement of cylinder correctly.
- Application of environment:
 - It is Not allow to use the sensor in the environment with explosive gas.
 - Magnetic sensor shall not be used in the environment with external magnetism.
 - Magnetic sensor shall not be used in the environment that is always eroded by water.
 - Magnetic sensor shall not be used in the environment with oil moisture or chemical substance.
 - Magnetic sensor shall not be used in the environment with periodically changing temperature.
 - Magnetic sensor shall not be used in the environment with excessively great impact.
 - Magnetic sensor shall not be used in the environment with sources of electrical pulse.
 - Avoid the environment with accumulated iron power and dense magnetic objects.